


LEADER LEADER TECHNOLOGY(SHENZHEN) CO.,LIMITED

Address:No32 Xinwang Road,Songgang District Shenzhen ,China website: www.leadergroup-cn.com

www.leadergroup-cn.com


Tel:0086-769-33356021

Mail:lily-zou@leadergroup-cn.com

Item	Model No	Picture	Specification	state
NO.1	SY-MC4-15		<ul style="list-style-type: none"> 1.Contact:Tin-plated copper 2.Waterproof: IP67. 3.Housing material: 100% GE PPO. 4. Rated Voltage: TUV1500V DC 5.Proof voltae: 6000V AC (1 Min) /2200V DC (1 Min) 6.Temperature Range:-40°C~+90°C 7. Flame Class:UL94V-0 8. Resistance: ≤0.5mΩ 9.pin Dimension: 4.0mm 10.Pollution Degree: 2 11.Protection Class: Class II 12.Withdrawal Force: >50N 	

Remark:

b c 4 5 2

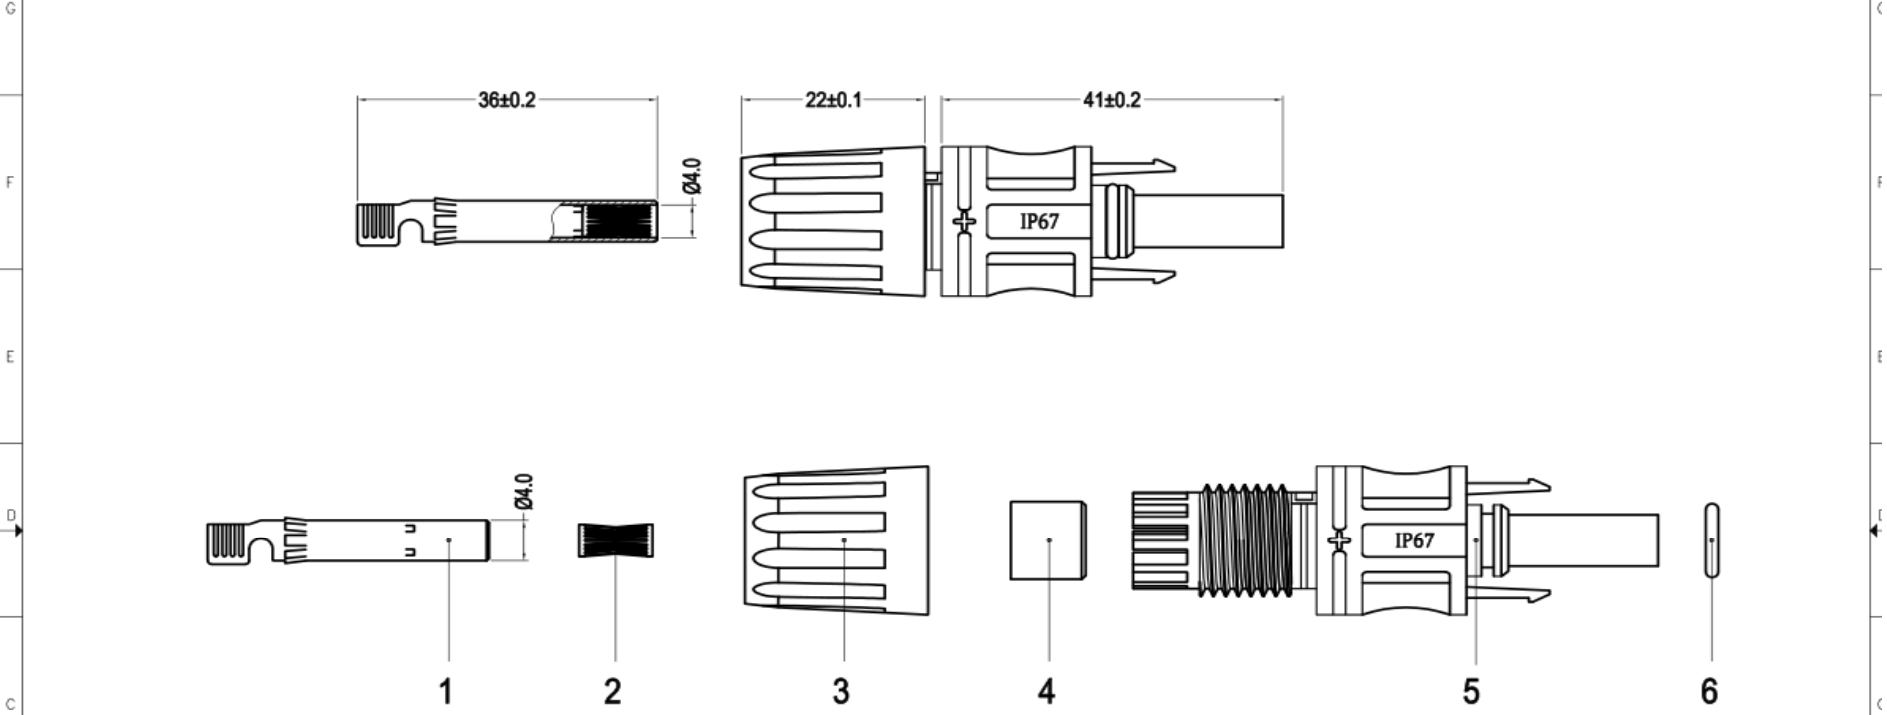

6	SY-MD4-2-S01-00	Ø10*1.5"O" Ring	1	Red	Silicone
5	SY-MD4-1-P01-00	Ø4.0 Cable Male Connector Housing	1	Black	PPO
4	SY-TC4B-S01-00	Ø10.5*7.0 Waterproof Ring(For 4~6MM ² Cable)	1	Black	Silicone
3	SY-TC4A-P01-00	Ø15 Turncap	1	Black	PPO
2	SY-TC4A-M02-00	Ø4 Drum Terminal	1	White	Beryllium Bronze
1	SY-MC4A-M01-00	Ø4 Female Terminal	1	White	Copper
No.	Product No.	Product Name	Q'TY	Colour	Material

Dimension	Tolerance
30.00~60.00	±0.05
60.00~90.00	±0.05
90.00~120.00	±0.05
120.00~	±0.05
Angle	
0~60°	±0.05
60°~	±0.05

eleksol

APVD: _____

CHK: _____


DWN: _____

NAME:
PV Ø4.0 Cable Female Connector

PRODUCT NUMBER:
MD4-1A

Units: MM Size: A4 SCALE: 1 OF 1 SHEET BLATT: 1 OF 1 REV: A

6 5 4 3 2 1

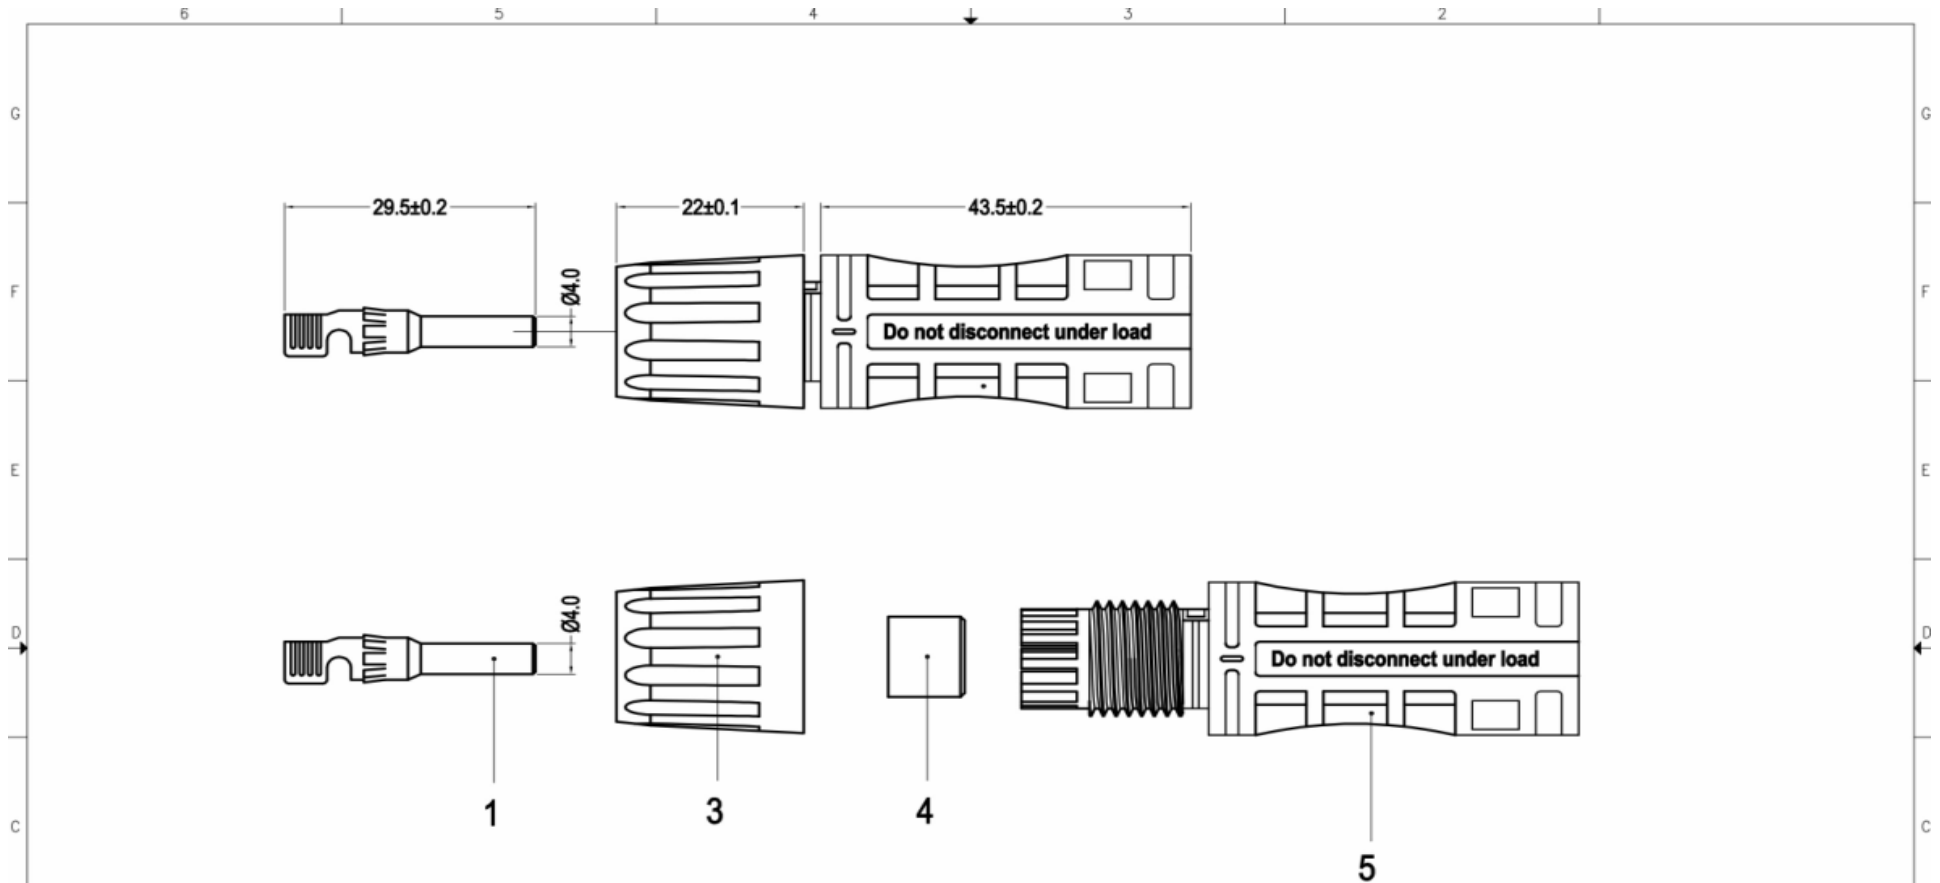

4	SY-MD4-1-P01-00	Ø4.0 Cable Male Connector Housing	1	Black	PPO	<table border="1"> <tr> <th>Dimension</th> <th>Tolerance</th> <th colspan="2">LEADER TECHNOLOGY (SHENZHEN) CO.,LIMITED</th> </tr> <tr> <td>30.00~60.00</td> <td>±0.05</td> <td rowspan="2">APVD:</td> <td rowspan="2">NAME: 1500V Solar Cable Male Connector</td> </tr> <tr> <td>60.00~90.00</td> <td>±0.05</td> </tr> <tr> <td>90.00~120.00</td> <td>±0.05</td> <td rowspan="2">CHK:</td> <td rowspan="2">PRODUCT NUMBER: SY-MC4-15</td> </tr> <tr> <td>120.00~</td> <td>±0.05</td> </tr> <tr> <td>Angle</td> <td></td> <td rowspan="2">DWN:</td> <td></td> </tr> <tr> <td>0~60°</td> <td>±0.05</td> <td></td> </tr> <tr> <td>60°~</td> <td>±0.05</td> <td></td> <td></td> </tr> </table>	Dimension	Tolerance	LEADER TECHNOLOGY (SHENZHEN) CO.,LIMITED		30.00~60.00	±0.05	APVD:	NAME: 1500V Solar Cable Male Connector	60.00~90.00	±0.05	90.00~120.00	±0.05	CHK:	PRODUCT NUMBER: SY-MC4-15	120.00~	±0.05	Angle		DWN:		0~60°	±0.05		60°~	±0.05		
Dimension	Tolerance	LEADER TECHNOLOGY (SHENZHEN) CO.,LIMITED																															
30.00~60.00	±0.05	APVD:	NAME: 1500V Solar Cable Male Connector																														
60.00~90.00	±0.05																																
90.00~120.00	±0.05	CHK:	PRODUCT NUMBER: SY-MC4-15																														
120.00~	±0.05																																
Angle		DWN:																															
0~60°	±0.05																																
60°~	±0.05																																
3	SY-TC4B-S01-00	Ø10.5*7.0 Waterproof Ring(For 4~6MM ² Cable)	1	Black	Silicone																												
2	SY-TC4A-P01-00	Ø15 Turncap	1	Black	PPO																												
1	SY-MC4-2-M02-00	Ø4 Male Terminal	1	White	Copper																												
No.	Product No.	Product Name	Q'TY	Colour	Material	<table border="1"> <tr> <td>Units:</td> <td>Size:</td> <td>SCALE:</td> <td>SHEET BLATT:</td> <td>REV:</td> </tr> <tr> <td>MM</td> <td>A4</td> <td>1</td> <td>1 OF 1</td> <td>A</td> </tr> </table>	Units:	Size:	SCALE:	SHEET BLATT:	REV:	MM	A4	1	1 OF 1	A																	
Units:	Size:	SCALE:	SHEET BLATT:	REV:																													
MM	A4	1	1 OF 1	A																													